


## BI-METAL THERMOMETERS (BOTTOM CONNECTION)

COMBINES WITH ROBUST CONSTRUCTION AND ELIMINATES THE NEED FOR ANY CAPILLARY TUBING THAT MAKES THE THERMOMETER SUITABLE FOR THE MOST STRINGENT ENVIRONMENTAL CONDITIONS AND GIVES AN ACCURATE INDICATION EVERY TIME WITH THE DIRECT DRIVE FROM COIL TO POINTER.

- CASE & CONNECTION MATERIAL: 304 STAINLESS STEEL
- PARTS OF CONNECTION : SUS316; OTHERS CAN BE CUSTOMIZED.
- SENSOR BULB : SUS304 OR SUS316
- DIAL SCALE PLATE : ALUMINUM; WHITE BACKGROUND WITH BLACK FIGURES & MARKS
- TEMPERATURE RANGE : -50 ~ +600 ° C
- SENSOR BULB DIAMETER : STANDARD  $\varnothing 6.35\text{MM}$ ;  $\varnothing 4 \sim \varnothing 12\text{MM}$  CAN BE CUSTOMIZED.
- LENGTH OF SENSOR BULB : 2" ~ 60" BY ORDERS
- ACCURACY : 1.0% ON FULL SCALE
- HL ELECTRIC CONTACTS CAN BE INSTALLED ADDITIONALLY.

### STAINLESS STEEL FOR EXPOSED PARTS

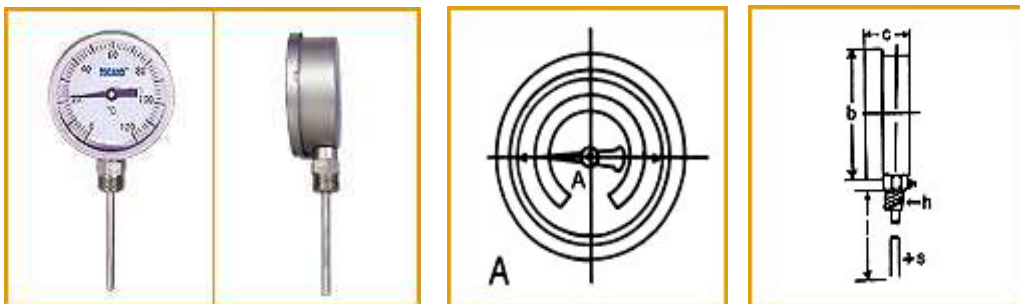

**BS TYPE**

(mm)						
	a	b	c	h	l	s
BS 3"	70	85	43	1/4PT	2" 3" 60"	4 $\varnothing$ 6 $\varnothing$ 12 $\varnothing$
BS 4"	96	115	52	1/2PT		
BS 6"	140	160	46			