



SUSF-15~50

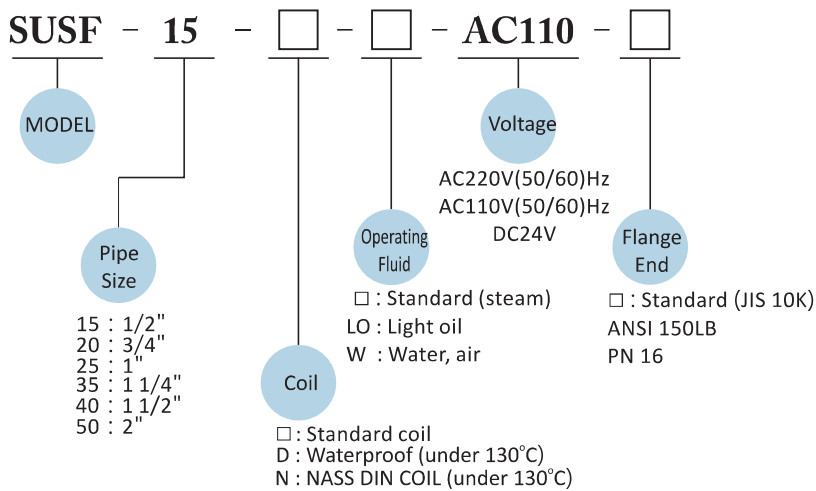

PRODUCT DESCRIPTION

- SUSF series is multiplex, piston guiding, conductive and normally closed (NC) 2/2 way solenoid valve.
- Applied fluid type : water, air, steam, light oil
- Recommend to apply to frequent operation
- Acceptable for customization Viton (130°C) , Silicone (130°C) and EPDM (130°C) for seal plug

CAUTIONS:


- Before pipelining, the pipe line must be very clean without any contaminants or impurity.
- To extend the lifetime, Y-line filter should be installed in the front end of solenoid valve.
- AC voltage tolerance: $\pm 10\%$; DC voltage tolerance: $\pm 1\%$
- It should be installed horizontally; vertical installation is not advisable.

Not Suitable For Fluid As Below:

- Liquid status when it is in high temperature; solid status when it is in low temperature.
- Corrosive fluid
- Viscosity over 20cst

MATERIAL:

PARTS	Coil	Tube	Spring	Core	Plug	Piston Spring	Piston	Piston plug	Valve body
MATERIAL	Special copper wire (H class)	Stainless steel	Stainless steel	Stainless steel	PTFE	Stainless steel	Stainless steel	PTFE	Stainless steel

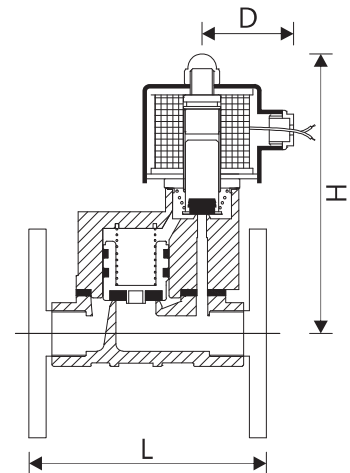

SPECIFICATION

MODEL	Waterproof DIN/flying lead Coil	NASS DIN Coil (IP65)	PIPE SIZE	CV	ORIFICE	FLUID TEMP. (°C)	Operating Pressure kgf / cm ² (bar)					Dimension (mm)			Weight (kg)
							Water	Air	Steam	Light oil	Gas	L	H	D	
SUSF-15	●	●	1/2"	4.0	17mm	-5°C ~ +185°C	0.5~10	0.5~10	0.5~10	0.5~10		120	115	48	2.5
SUSF-20	●	●	3/4"	6.0	17mm	-5°C ~ +185°C	0.5~10	0.5~10	0.5~10	0.5~10		120	120	48	3
SUSF-25	●	●	1"	12	22mm	-5°C ~ +185°C	0.5~10	0.5~10	0.5~10	0.5~10		149	132	48	4.3
SUSF-35	●	●	1 1/4"	18	30mm	-5°C ~ +185°C	1~10	1~10	1~10	1~10		170	142	48	5.6
SUSF-40	●	●	1 1/2"	22	30mm	-5°C ~ +185°C	1~10	1~10	1~10	1~10		170	146	48	6.1
SUSF-50	●	●	2"	48	50mm	-5°C ~ +185°C	1~10	1~10	1~10	1~10		211	173	48	9.6