

UF
(UF Series Solenoid Valve)



● UF-10




● UF-08



● UF-06

■ Graphics Sign



● Ordering Code

UF

UF

06

(Pipe Size):
06: G1/8
08: G1/4
10: G3/8

H

(Normal Type)
H: (High-Temperature Type)

AC220V

(Standard Voltage):
AC110V
AC220V
AC380V
DC24V


Specific Property:

This valve has direct action type piston and quick action. The body adopts stainless steel, with anticorrosion, high efficiency, long service life, good waterproof performance and multiple wiring directions.

■ Technical Parameter

(Item) \ (Specification)	UF-06	UF-08	UF-10
Material of Body	Stainless Steel		
Operating Method	Direct Action Type		
Pipe Size	G1/8	G1/4	G3/8
Nominal Diameter (mm)	3	4	5
Applicable Fluid	(Air)、(Water)、(Oil) (5CST)	(5CST bellow)、(Steam)、(Chemicals)	
Pressure Range	0 ~ 1.0MPa		
Applicable Temperature	(Normal Type): -5 ~ 99°C ; (High-Temperature Type): -5 ~ 185°C		
Specified Voltage	AC12V、AC24V、AC36V、AC110V、AC220V、AC380V、DC12V、DC24V、DC110V		
Operating Voltage Range	± 15%		
Min. Activating Time	0.05S		

■ Figure Dimension

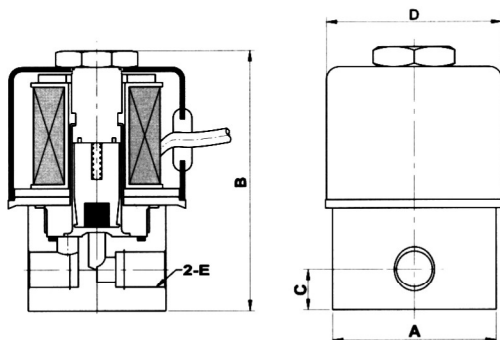

Specification	A	B	C	D	E
UF-06	φ 37.5	68	10	42	G1/8
UF-08	φ 37.5	68	10	42	G1/4
UF-10	φ 45	72	12	42	G3/8