

US
(US Series Solenoid Valve)


US-50



US-40



US-25




US-20



US-15

Graphics Sign



Ordering Code

US	10	AC220V
US	(Pipe Size): 10: ZG3/8 15: ZG1/2 20: ZG3/4 25: ZG1 35: ZG1 1/4 40: ZG1 1/2 50: ZG2	(Standard Voltage): AC110V AC220V AC380V DC24V



Specific Property:

It adopts teflon hard seal structure, with reliable performance, anticorrosion, high-temperature resistance, large flow, high pressure, good waterproof performance and multiple wiring directions.

Technical Parameter

(Item) \ (Specification)	US-10	US-15	US-20	US-25	US-35	US-40	US-50
Material of Body	(Foundry)						
Operating Method	(Plunger Pilot)						
Pipe Size	ZG3/8	ZG1/2	ZG3/4	ZG1	ZG1 1/4	ZG1 1/2	ZG2
Nominal Diameter (mm)	17	17	17	20	30	30	50
Applicable Fluid	(Air)、(Water)、(Oil) (5CST) (5CST bellow)、(Steam)						
Pressure Range	0.05 ~ 1.5MPa						
Applicable Temperature	-5 ~ 185℃						
Specified Voltage	AC12V、AC24V、AC36V、AC110V、AC220V、AC380V、DC12V、DC24V、DC110V						
Operating Voltage Range	± 10%						
Min. Activating Time	0.05S						
Install Method	(Horizontal Fixing)						

Figure Dimension

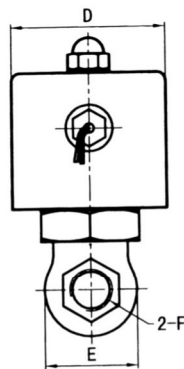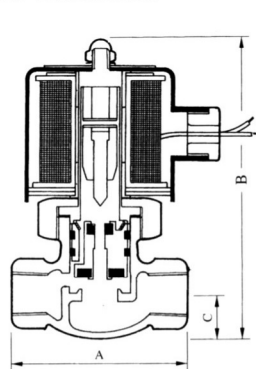

Specification	A	B	C	D	E	F
US-10	83	146	21	φ 70	42	ZG3/8
US-15	83	146	21	φ 70	42	ZG1/2
US-20	83	146	21	φ 70	42	ZG3/4
US-25	90	162	26	φ 70	52	ZG1
US-35	110	183	36	φ 70	74	ZG1 1/4
US-40	110	183	36	φ 70	74	ZG1 1/2
US-50	163	223	47	φ 70	95	ZG2