

UZ (UZ Series Solenoid Valve)



● UZ-A-06



● UZ-A-08



● UZ-B-06, 08, 10




● UZ-C-06, 08, 10


Graphics Sign

● UZ-A-06, 08

● UZ-B-06, 08, 10



● UZ-C-06, 08, 10



Ordering Code

UZ	A	06	H	AC220V
UZ	(Structure Type): A/B : (2 Position/2 Ports) C: (2 Position/3 Ports)	(Pipe Size): 06: G1/8 08: G1/4 10: G3/8	(Normal Type) H: (High-Temperature Type)	(Standard Voltage): AC110V AC220V AC380V DC24V

Specific Property:


This valve has direct action type piston and quick action, with multiple purposes, high efficiency, long service life, good waterproof performance, multiple wiring directions and handsome shape.

Technical Parameter


(Item) \ (Specification)	UZ-A-06	UZ-A-08	UZ-B-06/UZ-C-06	UZ-B-08/UZ-C-08	UZ-B-10/UZ-C-10
Material of Body	Brass				
Operating Method	Direct Action Type				
Pipe Size	G1/8	G1/4	G1/8	G1/4	G3/8
Nominal Diameter (mm)	2.5	2.5	3	4	5
Applicable Fluid	(Air), (Water), (Oil) (5CST) (5CST below), (Steam)				
Pressure Range	0 ~ 1.0MPa				
Applicable Temperature	(Normal Type): -5 ~ 99°C; (High-Temperature Type): -5 ~ 185°C				
Specified Voltage	AC12V, AC24V, AC36V, AC110V, AC220V, AC380V, DC12V, DC24V, DC110V				
Operating Voltage Range	± 15%				
Min. Activating Time	0.05S				

Figure Dimension

● UZ-A-06, 08



● UZ-B-06, 08, 10

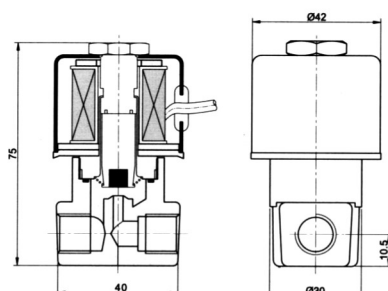

● UZ-C-06, 08, 10

