


电磁阀 /Solenoid Valve 气控阀 /Air control Valve

2

特 点 /Characteristic:

- 正常使用 1000 万次以上寿命。
- 阀体经特殊镜面加工及硬质处理。
- 采用进口油封摩擦阻力小, 增长油封寿命。
- 使用进口线圈、低耗电量、反应快速。
- Service life:10million cycle times.
- The bodies are mirror finished and hardening treated.
- Equipped with imported oil seals with smaller friction and longer service life.
- With imported coils,low power consumption,speedy response.
- Capable of long service time without being damaged.

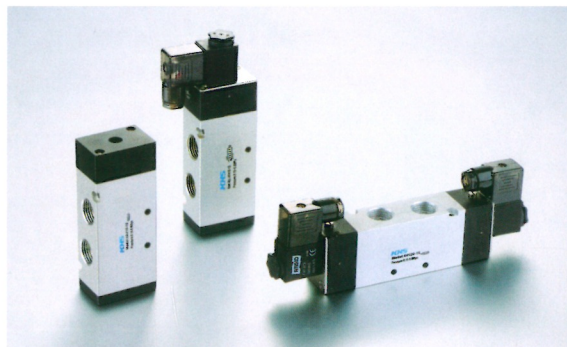

型号注释 /Note for type:

4V	4	10	15	AC220V	W
系 列 /Series: 4V:二(三)位五口电磁阀 4V: 2(3)position 5 ports solenoid valve 4A:二(三)位五口气控阀 4A: 2(3)position 5 ports air control valve 3V:二位三口电磁阀 3V: 2 position 3 ports solenoid valve 3A:二位三口气控阀 3A: 2 position 3 ports air control valve 4M:二位五口板接式 4M: 2 position 5 ports board conneted 4M:三位五口板接式 4M: 3 position 5 ports board conneted	系列代号: Series code: 400 系列 400 Series	线圈及位数: Coil and position: 10:单电控双位置 Single coil 2 position 20:双电控双位置 Double coil 2 position 30C: 三位置中封式 3 positions enclosed type 30E: 三位置中泄式 3 positions exhausted type 30P: 三位置中压式 3 positions press type	接管口径: Port size: 15:G1/2"	线圈电压: Coil voltage: DC12V DC24V AC24V 50/60Hz AC110V 50/60Hz AC220V 50/60Hz AC380V 50/60Hz	接线形式: Wiring type: Blank(空白): 茶色带灯端子式/Browns B:白色带灯端子式/White H:黑色端子式/Black W:引线式/Lead wire type

技术参数 /Specification:

型 号/Type	4V410-15	4V420-15	4V430C-15	4V430E-15	4V430P-15
	4A410-15	4A420-15	4A430C-15	4A430E-15	4A430P-15
位置数/position number	二位五口/2 Positon 5 Way		三位五口/3 Positon 5 Way		
有效截面积/Effective sectional area	25mm²(CV=1.40)		30mm²(CV=1.68)		
型号 /Type	3V410-15	3V420-15	3A410-15	3A420-15	
位置数/position number	二位三口/2 Positon 3 Way				
有效截面积/Effective sectional area	50mm²(CV=2.79)				
接管口径 /Port size	进气/input= 出气/output= 排气/exhausted=G1/2"				
工作介质 /Fluid	经 40 μ m 过滤的压缩空气 /Compressed Air				
动作方式 /Acting type	内部先导式/Internally pilot-actuated				
使用压力范围/Working pressure (MPa)	0.2~0.8				
使用温度范围/Ambient temperature(℃)	-5~50				
使用电压范围 /Voltage range	± 10%				