


SS316 WATER PRESSURE REDUCING VALVE WPV-316 SERIES

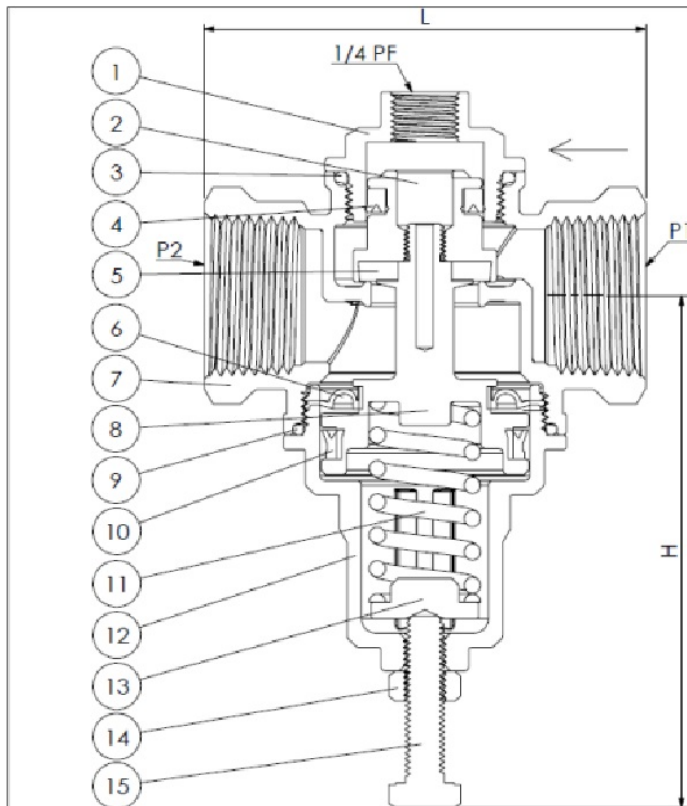


NO.	NAME	MATERIAL
1	CAP	SS316
2	PISTON	SS316
3	O-RING	VITON
4	U-RING	VITON
5	GASKET	VITON
6	GASKET	VITON
7	BODY	SS316
8	STEM	SS316
9	O-RING	VITON
10	U-RING	VITON
11	SPRING	SS304
12	LOW CAP	SS316
13	SPRING SEAT	BRASS
14	NUT	SS304
15	ADJUST SCREW	SS304

DIMENSION				
SIZE	P1 (PT/PS/PF)	P2 (PT/PS/PF)	L	H
1/2"	1/2"	1/2"	70.5	105
3/4"	3/4"	3/4"	85.6	105
1"	1"	1"	90.5	106
1-1/4"	1-1/4"	1-1/4"	98	108
1-1/2"	1-1/2"	1-1/2"	115.2	134
2"	2"	2"	120.8	152

Maximum Pressure	20KG								Type	WPV-316
Maximum Temperature	200C								Qty	
Adjustable Pressure	0.2 - 6 KG/CM2								SCALE	1:1
REVISION	Date	Description	Check						UNIT	mm

วิธีตั้งแรงดัน **Reducing Valve : WPV Series**

1. คลายนัทออก (14)
2. ปรับสกรูเพื่อตั้งแรงดัน (15)
3. ล็อคตัวนัท (14)

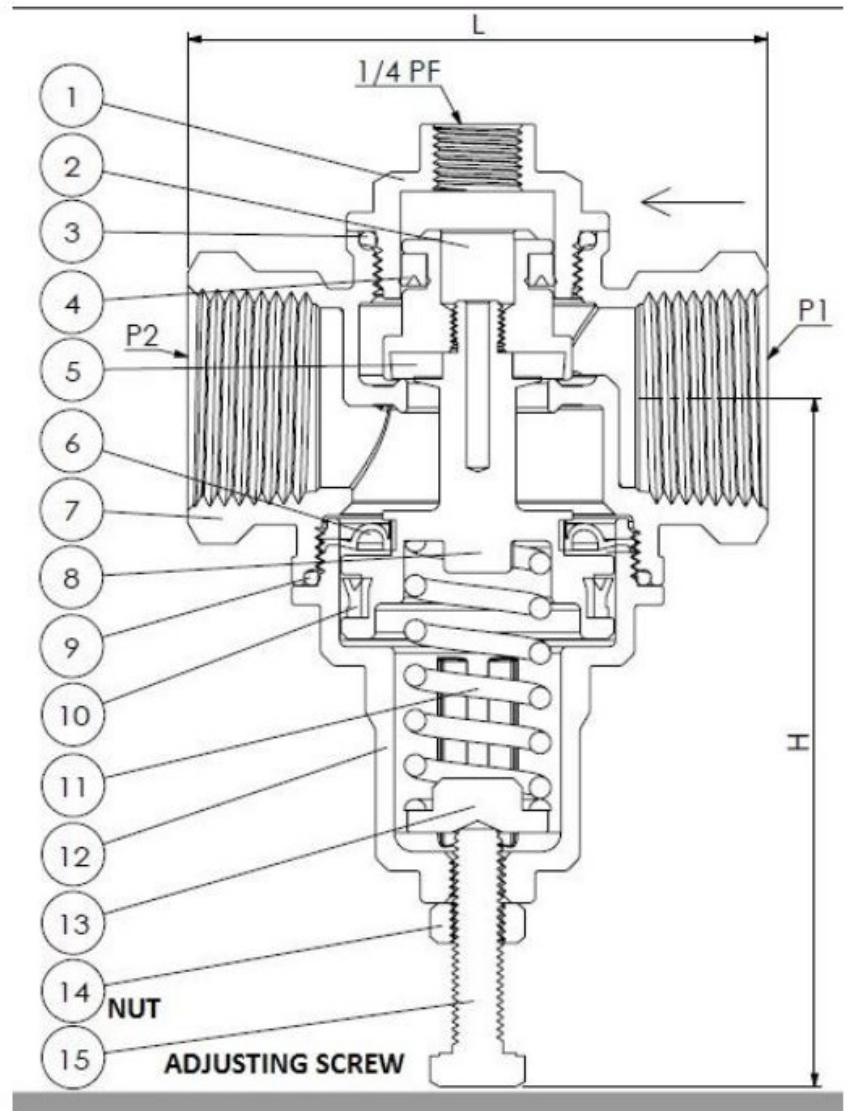

หมายเหตุ: รูนสแตนต์คาร์ดในสติก ตั้งได้ระหว่าง 0.3 - 6Kg/cm²