


Hand Valve/Foot Valve



Technical Parameter

Item \ Specification	TH-402 / TH-403	TH-402A / TH-403A	TB-402 / TB-403	TB-402A / TB-403A	TF-402 / TF-403	TF-402A / TF-403A
Material of Body	Aluminum Alloy					
Control Form	Hand		Hand		Foot	
Function	2 Positions/5 Ports					
Pipe Size	G1 / 4, G3/8					
Applicable Fluid	Air					
Pressure Range	0 ~ 0.8MPa					
Medium Temperature	-5 ~ 60°C					

Figure Dimension

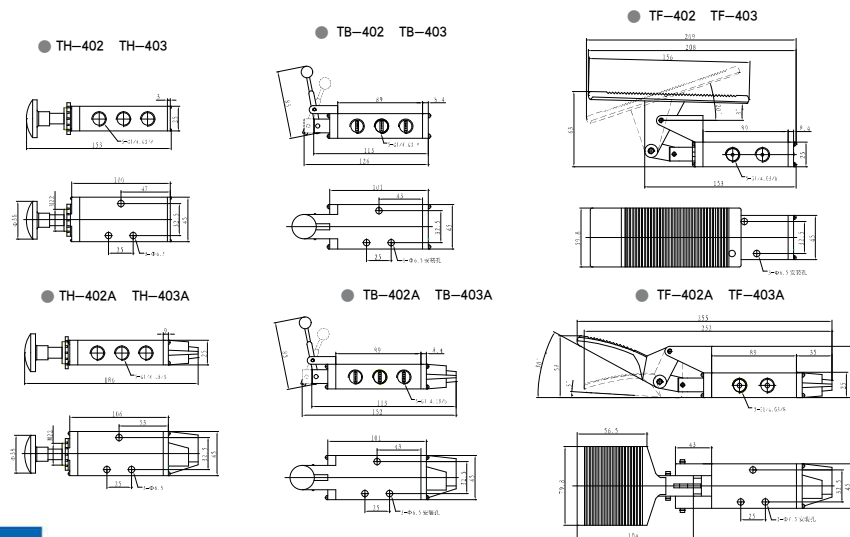


Speed Control Valve



Character

It is a one-way flow control valve which can regulate the flow of compressed air in air passage. It will control forward flow and not control reversed flow, so as to change the oneway movement speed of executive components such as air cylinder.

Ordering Code



Graphics Sign




Technical Parameter

Specification/Item	Pipe size	Applicable Medium	Min. Operating Pressure	Pressure Range	Medium Temperature
Precision type	SV-01 G1/8	Air	0.03MPa	0.05 ~ 1.2 MPa	-5 ~ 60°C
	SV-02 G1/4				
	SV-03 G3/8				
	SV-04 G1/2				
Basic type	ST-01 G1/8			0.05 ~ 0.8 MPa	-5 ~ 60°C
	ST-02 G1/4				
	ST-03 G3/8				
	ST-04 G1/2				
	ST-06 G3/4				
	ST-10 G1				


Figure Dimension

Precision Type



Specification	SV-01	SV-02	SV-03	SV-04
A	24.5	24.5	38	38
B	35	35	50	50
C	21	21	33	33
D	26	26	40	40
E	φ 4.5	φ 4.5	φ 5.5	φ 5.5
F	50	50	68	68
G	10	10	16	16
H	16	19	25	25
R	G1/8	G1/4	G3/8	G1/2
S	M12	M12	M16	M16

Basic Type

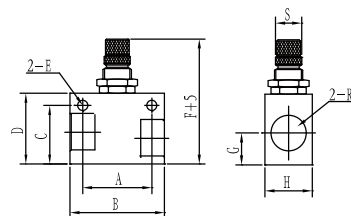

Specification	ST-01	ST-02	ST-03	ST-04	ST-06	ST-10
A	22	26	30	30	47	60
B	32	36	40	40	65	80
C	18	22	25	30	53	52.5
D	23	27	30	35	59.5	60
E	φ 4.3	φ 4.3	φ 4.3	φ 4.3	φ 8.5	φ 8.5
F	46/54	50/58	53/61	58/66	109/119	112/122
G	9.6	12	13	15	29.8	30
H	17	18	22	26	35	44
R	G1/8	G1/4	G3/8	G1/2	G3/4	G1
S	M14	M14	M14	M14	—	—